



Pulegge dentate per bussola conica
Timing belt pulleys for taper bushes
Zahnriemenscheiben für Spannbüchsen
Poulies dentées pour moyeux amovibles
Poleas para correas dentadas para casquillos cónicos



Ketten
Kugellager
Korsten

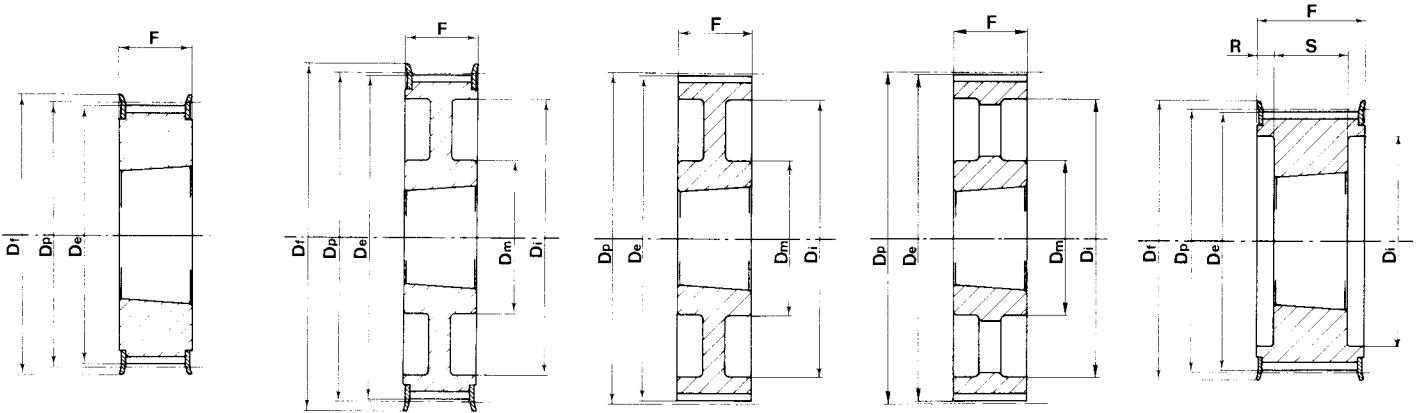


tipo
type 3F

tipo
type 3WF

tipo
type 3W

tipo
type 3A

tipo
type 4F

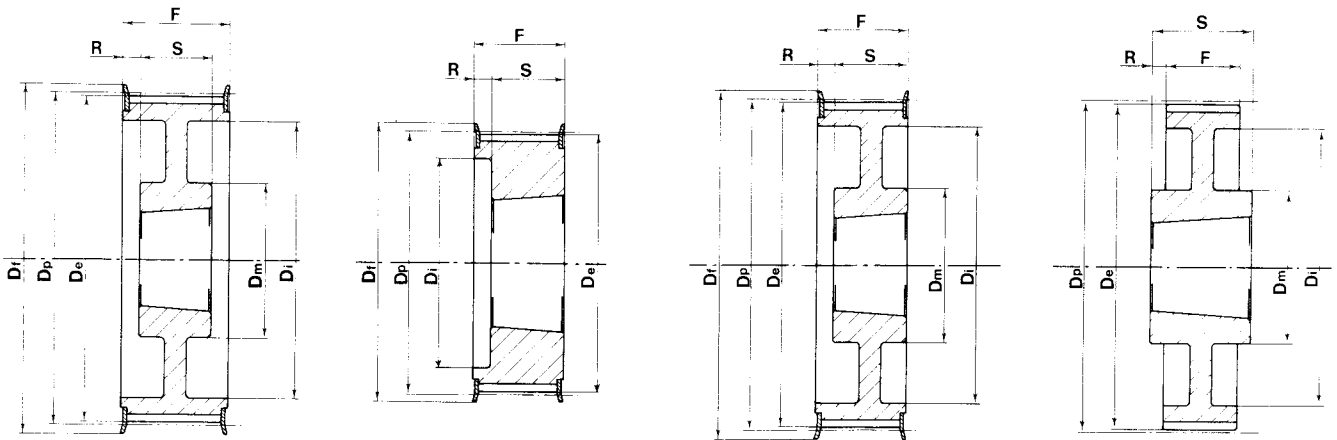


tipo
type 4WF

tipo
type 5F

tipo
type 5WF

tipo
type 7W

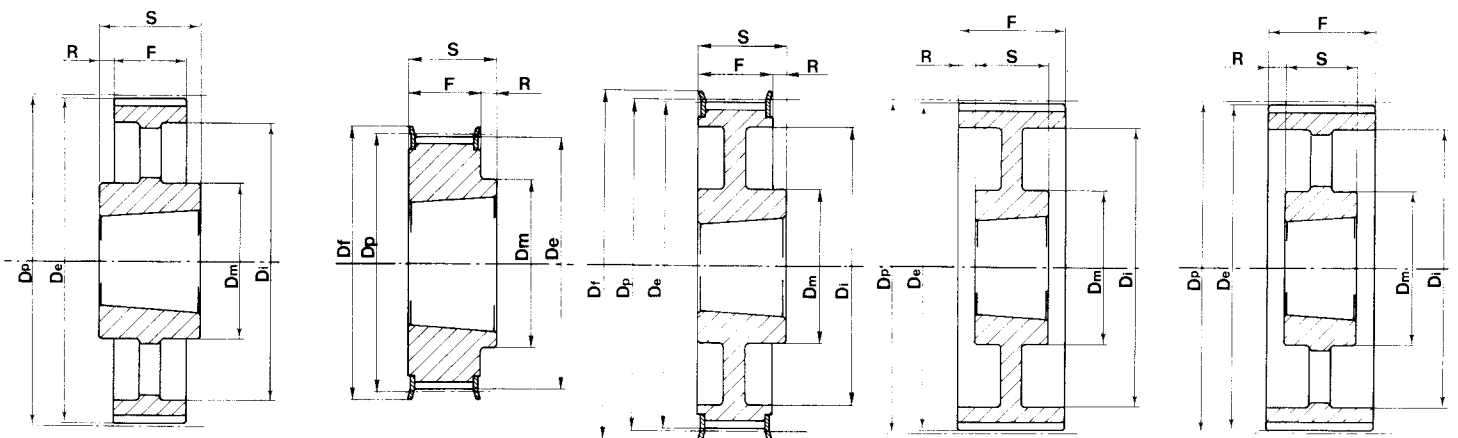

tipo
type 7A

tipo
type 8F

tipo
type 8WF

tipo
type 9W

tipo
type 9A

Pulegge dentate per bussola conica
Timing belt pulleys for taper bushes
Zahnriemenscheiben für Spannbüchsen
Poulies dentées pour moyeux amovibles
Poleas para correas dentadas para casquillos cónicos



Ketten
Kugellager
Korsten

L 075 - 3/8" (9,525 mm)

CARATTERISTICHE FEATURES MERKMALE CARACTERISTIQUES CARACTERISTICAS		CODICE CODE SYMBOL FABRIK- NUMMER CODE SYMBOLE NUMERO DE FABRICA	CODICE SATI SATI CODE SATI FABRIK- NUMMER CODE SATI NUMERO DE SATI	TIPO TYPE TYP TYPE TIPO	BUSSOLA BUSH BUCHSE MOYEU CASQUILLO	FORO MAX. MAX. BORE MAX. BOHRUNG ALESAGE MAX. AGUJERO MAX.	Dp	De	Df	Dm	Di	F	S	R	PESO WEIGHT GEWICHT POIDS PESO Kg.
ACCIAIO STEEL STAHL ACIER ACERO		18 L 075	70018 4A	3F	1108	28	54,57	53,81	60	-	-	25,0	25,0	-	0,2
		19 L 075	70019 4A	3F	1108	28	57,61	56,84	63	-	-	25,0	25,0	-	0,3
		20 L 075	70020 4A	3F	1108	28	60,64	59,88	67	-	-	25,0	25,0	-	0,3
		21 L 075	70021 4A	3F	1108	28	63,67	62,91	70	-	-	25,0	25,0	-	0,4
		22 L 075	70022 4A	3F	1108	28	66,70	65,94	75	-	-	25,0	25,0	-	0,4
GHISA CAST IRON GRAUGUSS FONTE HIERRO FUNDIDO	CON FLANGIA WITH FLANGES MIT FLANSCHEN AVEC FLASQUES CON TAPETAS	23 L 075	70023 4A	3F	1108	28	69,73	68,97	79	-	-	25,0	25,0	-	0,4
		24 L 075	70024 4A	3F	1108	28	72,77	72,00	79	-	-	25,0	25,0	-	0,5
		25 L 075	70025 4A	3F	1108	28	75,80	75,04	87	-	-	25,0	25,0	-	0,6
		26 L 075	70026 4A	3F	1108	28	78,83	78,07	87	-	-	25,0	25,0	-	0,6
		27 L 075	70027 4A	3F	1108	28	81,86	81,10	91	-	-	25,0	25,0	-	0,7
		28 L 075	70028 4A	3F	1108	28	84,89	84,13	91	-	-	25,0	25,0	-	0,7
		30 L 075	70030 4A	3F	1108	28	90,96	90,20	97	-	-	25,0	25,0	-	0,9
		32 L 075	70032 4A	3F	1108	28	97,02	96,26	102	-	-	25,0	25,0	-	1,0
		36 L 075	70036 4A	3F	1210	35	109,15	108,39	120	-	-	25,0	25,0	-	1,2
		40 L 075	70040 4A	3F	1210	35	121,28	120,51	128	-	-	25,0	25,0	-	1,7
		48 L 075	70048 4B	3WF	1610	42	145,53	144,77	150	92	125	25,0	25,0	-	2,5
		SENZA FLANGIA WITHOUT FLANGES OHNE FLANSCHEN SANS FLASQUES SIN TAPETAS		60 L 075	70060 4C	3W	1610	42	181,91	181,15	-	92	166	25,0	25,0
72 L 075	70072 4D			3A	1610	42	218,30	217,53	-	92	202	25,0	25,0	-	4,0
84 L 075	70084 8B			7A	2012	50	254,68	253,90	-	106	236	25,0	32,0	3,5	5,2
96 L 075	70096 8B			7A	2012	50	291,06	290,30	-	106	270	25,0	32,0	3,5	6,5
120 L 075	70120 8B			7A	2012	50	363,83	363,07	-	106	343	25,0	32,0	3,5	7,6

L 100 - 3/8" (9,525 mm)

CARATTERISTICHE FEATURES MERKMALE CARACTERISTIQUES CARACTERISTICAS		CODICE CODE SYMBOL FABRIK- NUMMER CODE SYMBOLE NUMERO DE FABRICA	CODICE SATI SATI CODE SATI FABRIK- NUMMER CODE SATI NUMERO DE SATI	TIPO TYPE TYP TYPE TIPO	BUSSOLA BUSH BUCHSE MOYEU CASQUILLO	FORO MAX. MAX. BORE MAX. BOHRUNG ALESAGE MAX. AGUJERO MAX.	Dp	De	Df	Dm	Di	F	S	R	PESO WEIGHT GEWICHT POIDS PESO Kg.
ACCIAIO STEEL STAHL ACIER ACERO		18 L 100	71018 7A	5F	1108	28	54,57	53,81	60	-	38	31,0	22,0	9,0	0,2
		19 L 100	71019 7A	5F	1108	28	57,61	56,84	63	-	38	31,0	22,0	9,0	0,3
		20 L 100	71020 7A	5F	1108	28	60,64	59,88	67	-	45	31,0	22,0	9,0	0,4
		21 L 100	71021 7A	5F	1108	28	63,67	62,91	70	-	47	31,0	22,0	9,0	0,4
		22 L 100	71022 7A	5F	1108	28	66,70	65,94	75	-	51	31,0	22,0	9,0	0,4
GHISA CAST IRON GRAUGUSS FONTE HIERRO FUNDIDO	CON FLANGIA WITH FLANGES MIT FLANSCHEN AVEC FLASQUES CON TAPETAS	23 L 100	71023 7A	5F	1108	28	69,73	68,97	79	-	54	32,0	22,0	10,0	0,5
		24 L 100	71024 7A	5F	1108	28	72,77	72,00	79	-	54	32,0	22,0	10,0	0,6
		25 L 100	71025 7A	5F	1108	28	75,80	75,04	87	-	56	32,0	22,0	10,0	0,6
		26 L 100	71026 7A	5F	1108	28	78,83	78,07	87	-	60	32,0	22,0	10,0	0,7
		27 L 100	71027 7A	5F	1108	28	81,86	81,10	91	-	62	32,0	22,0	10,0	0,8
		28 L 100	71028 7A	5F	1108	28	84,89	84,13	91	-	65	32,0	22,0	10,0	0,8
		30 L 100	71030 7A	5F	1210	35	90,96	90,20	97	-	71	32,0	25,0	7,0	0,9
		32 L 100	71032 7A	5F	1210	35	97,02	96,26	102	-	75	32,0	25,0	7,0	1,0
		36 L 100	71036 7A	5F	1210	35	109,15	108,39	120	-	89	32,0	25,0	7,0	1,4
		40 L 100	71040 7A	5F	1610	42	121,28	120,51	128	-	101	32,0	25,0	7,0	1,7
		48 L 100	71048 7B	5WF	1610	42	145,53	144,77	150	92	124	32,0	25,0	7,0	2,7
		SENZA FLANGIA WITHOUT FLANGES OHNE FLANSCHEN SANS FLASQUES SIN TAPETAS		60 L 100	71060 3D	9W	1610	42	181,91	181,15	-	92	166	32,0	25,0
72 L 100	71072 4D			3A	2012	50	218,30	217,53	-	106	202	32,0	32,0	-	4,4
84 L 100	71084 4D			3A	2012	50	254,68	253,90	-	106	236	32,0	32,0	-	6,0
96 L 100	71096 4D			3A	2012	50	291,06	290,30	-	106	270	32,0	32,0	-	7,1
120 L 100	71120 4D			3A	2012	50	363,83	363,07	-	106	343	32,0	32,0	-	8,5

Pulegge dentate per bussola conica
Timing belt pulleys for taper bushes
Zahnriemenscheiben für Spannbüchsen
Poulies dentées pour moyeux amovibles
Poleas para correas dentadas para casquillos cónicos



Ketten
Kugellager
Korsten


H 100 - 1/2" (12,7 mm)

CARATTERISTICHE FEATURES MERKMALE CARACTERISTIQUES CARACTERISTICAS		CODICE CODE SYMBOL FABRIK- NUMMER CODE SYMBOL NUMERO DE FABRICA	CODICE SATI SATI CODE SATI FABRIK- NUMMER CODE SATI NUMERO DE SATI	TIPO TYPE TYP TYPE TIPO	BUSSOLA BUSH BUCHSE MOYEU CASQUILLO	FORO MAX. MAX. BORE MAX. BOHRUNG ALESAGE MAX. AGUJERO MAX.	Dp	De	Df	Dm	Di	F	S	R	PESO WEIGHT GEWICHT POIDS PESO Kg.		
ACCIAIO STEEL STAHL ACIER ACERO		16 H 100	72016 7A	5F	1108	28	64,68	63,31	70	—	45	31,0	22,0	9,0	0,4		
		18 H 100	72018 7A	5F	1210	35	72,77	71,39	79	—	52	31,0	25,0	6,0	0,5		
		19 H 100	72019 7A	5F	1210	35	76,81	75,44	83	—	56	31,0	25,0	6,0	0,6		
		20 H 100	72020 7A	5F	1210	35	80,55	79,48	87	—	60	31,0	25,0	6,0	0,7		
GHISA CAST IRON GRAUGUSS FONTE HIERRO FUNDIDO	CON FLANGIA WITH FLANGES MIT FLANSCHEN AVEC FLASQUES CON TAPETAS	21 H 100	72021 7A	5F	1210	35	84,89	83,52	91	—	63	32,0	25,0	7,0	0,8		
		22 H 100	72022 7A	5F	1210	35	88,94	87,56	94	—	67	32,0	25,0	7,0	0,9		
		23 H 100	72023 7A	5F	1210	35	92,98	91,61	102	—	71	32,0	25,0	7,0	0,9		
		24 H 100	72024 7A	5F	1610	42	97,02	95,65	102	—	75	32,0	25,0	7,0	1,0		
		25 H 100	72025 7A	5F	1610	42	101,06	99,69	112	—	79	32,0	25,0	7,0	1,0		
		26 H 100	72026 7A	5F	1610	42	105,11	103,73	112	—	83	32,0	25,0	7,0	1,2		
		27 H 100	72027 7A	5F	1610	42	109,15	107,78	120	—	87	32,0	25,0	7,0	1,3		
		28 H 100	72028 7A	5F	1610	42	113,19	111,82	120	—	91	32,0	25,0	7,0	1,5		
		30 H 100	72030 7A	5F	1610	42	121,28	119,90	128	—	99	32,0	25,0	7,0	1,7		
		32 H 100	72032 7B	5WF	1610	42	129,36	127,99	135	92	108	32,0	25,0	7,0	2,0		
		36 H 100	72036 7B	5WF	1610	42	145,53	144,16	158	92	124	32,0	25,0	7,0	2,7		
		40 H 100	72040 7B	5WF	1610	42	161,70	160,33	168	92	140	32,0	25,0	7,0	3,6		
		44 H 100	72044 4B	3WF	2012	50	177,87	176,50	184	106	153	32,0	32,0	—	3,8		
		48 H 100	72048 4B	3WF	2012	50	194,04	192,67	200	106	169	32,0	32,0	—	3,2		
		SENZA FLANGIA WITHOUT FLANGES OHNE FLANSCHEN SANS FLASQUES SIN TAPETAS		60 H 100	72060 3E	9A	2012	50	242,55	241,18	—	106	223	34,0	32,0	1,0	4,8
				72 H 100	72072 3E	9A	2012	50	291,06	289,69	—	106	270	34,0	32,0	1,0	5,7
84 H 100	72084 3E			9A	2012	50	339,57	338,20	—	106	318	34,0	32,0	1,0	6,8		
96 H 100	72096 8B			7A	2517	60	388,08	386,71	—	119	366	34,0	45,0	5,5	8,2		
120 H 100	72120 8B			7A	2517	60	485,10	483,73	—	119	462	34,0	45,0	5,5	12,1		

H 150 - 1/2" (12,7 mm)

CARATTERISTICHE FEATURES MERKMALE CARACTERISTIQUES CARACTERISTICAS		CODICE CODE SYMBOL FABRIK- NUMMER CODE SYMBOL NUMERO DE FABRICA	CODICE SATI SATI CODE SATI FABRIK- NUMMER CODE SATI NUMERO DE SATI	TIPO TYPE TYP TYPE TIPO	BUSSOLA BUSH BUCHSE MOYEU CASQUILLO	FORO MAX. MAX. BORE MAX. BOHRUNG ALESAGE MAX. AGUJERO MAX.	Dp	De	Df	Dm	Di	F	S	R	PESO WEIGHT GEWICHT POIDS PESO Kg.		
ACCIAIO STEEL STAHL ACIER ACERO		18 H 150	73018 7A	5F	1210	35	72,77	71,39	79	—	53	45,0	25,0	20,0	0,6		
		19 H 150	73019 7A	5F	1210	35	76,81	75,44	83	—	56	45,0	25,0	20,0	0,7		
		20 H 150	73020 7A	5F	1210	35	80,55	79,48	87	—	60	45,0	25,0	20,0	0,8		
GHISA CAST IRON GRAUGUSS FONTE HIERRO FUNDIDO	CON FLANGIA WITH FLANGES MIT FLANSCHEN AVEC FLASQUES CON TAPETAS	21 H 150	73021 7A	5F	1210	35	84,89	83,52	91	—	64	45,0	25,0	20,0	1,0		
		22 H 150	73022 7A	5F	1210	35	88,94	87,56	94	—	68	45,0	25,0	20,0	1,2		
		23 H 150	73023 7A	5F	1610	42	92,98	91,61	102	—	71	45,0	25,0	20,0	1,3		
		24 H 150	73024 7A	5F	1610	42	97,02	95,65	102	—	74	45,0	25,0	20,0	1,0		
		25 H 150	73025 7A	5F	1610	42	101,06	99,69	112	—	78	45,0	25,0	20,0	1,2		
		26 H 150	73026 7A	5F	1610	42	105,11	103,73	112	—	82	45,0	25,0	20,0	1,4		
		27 H 150	73027 7A	5F	1610	42	109,15	107,78	120	—	87	45,0	25,0	20,0	1,6		
		28 H 150	73028 7A	5F	1610	42	113,19	111,82	120	—	91	45,0	25,0	20,0	1,8		
		30 H 150	73030 7A	5F	1610	42	121,28	119,90	128	—	99	45,0	25,0	20,0	2,3		
		32 H 150	73032 7B	5WF	1610	42	129,36	127,99	135	92	108	45,0	25,0	20,0	2,3		
		36 H 150	73036 7B	5WF	1610	42	145,53	144,16	158	92	124	45,0	25,0	20,0	3,1		
		40 H 150	73040 7B	5WF	1610	42	161,70	160,33	168	92	140	45,0	25,0	20,0	4,0		
		44 H 150	73044 7B	5WF	2012	50	177,87	176,50	184	106	153	45,0	32,0	13,0	4,4		
		48 H 150	73048 7B	5WF	2012	50	194,04	192,67	200	106	169	45,0	32,0	13,0	4,8		
		SENZA FLANGIA WITHOUT FLANGES OHNE FLANSCHEN SANS FLASQUES SIN TAPETAS		60 H 150	73060 3E	9A	2012	50	242,55	241,18	—	106	223	46,0	32,0	7,5	5,4
				72 H 150	73072 3E	9A	2012	50	291,06	289,69	—	106	270	46,0	32,0	7,5	6,5
84 H 150	73084 3E			9A	2012	50	339,57	338,20	—	106	320	46,0	32,0	7,5	8,4		
96 H 150	73096 3E			9A	2517	60	388,08	386,71	—	119	366	46,0	45,0	0,5	11,0		
120 H 150	73120 3E			9A	2517	60	485,10	483,73	—	119	462	46,0	45,0	0,5	14,8		

Pulegge dentate per bussola conica
Timing belt pulleys for taper bushes
Zahnriemenscheiben für Spannbüchsen
Poulies dentées pour moyeux amovibles
Poleas para correas dentadas para casquillos cónicos



Ketten
Kugellager
Korsten

XH 200 - 7/8" (22,225 mm)

CARATTERISTICHE FEATURES MERKMALE CARACTERISTIQUES CARACTERÍSTICAS		CODICE CODE SYMBOL FABRIK- NUMMER CODE SYMBOL NUMERO DE FABRICA	CODICE SATI SATI CODE SATI FABRIK- NUMMER CODE SATI NUMERO DE SATI	TIPO TYPE TYP TYPE TIPO	BUSSOLA BUSH BUCHSE MOYEU CASQUILLO	FORO MAX. MAX. BORE MAX. BOHRUNG ALESAGE MAX. AGUJERO MAX.	Dp	De	Df	Dm	Di	F	S	R	PESO WEIGHT GEWICHT POIDS PESO Kg.
GHISA CAST IRON GRAUGUSS FONTE HIERRO FUNDIDO	CON FLANGIA WITH FLANGES MIT FLANSCHEN AVEC FLASQUES CON TAPETAS	18 XH 200	76018 7A	5F	2517	60	127,34	124,55	142	-	95	64	45	19	
		20 XH 200	76020 7A	5F	2517	60	141,49	138,69	158	-	110	64	45	19	
		22 XH 200	76022 7A	5F	2517	60	155,64	152,84	168	-	120	64	45	19	
		24 XH 200	76024 7A	5F	2517	60	169,79	166,99	184	-	135	64	45	19	
		26 XH 200	76026 7A	5F	2517	60	183,94	181,14	200	-	150	64	45	19	
		28 XH 200	76028 5B	4WF	2517	60	198,08	195,29	211	120	165	64	45	9,5	
		30 XH 200	76030 5B	4WF	2517	60	212,23	209,44	226	120	180	64	45	9,5	
		32 XH 200	76032 5B	4WF	2517	60	226,38	223,59	240	120	195	64	45	9,5	
	40 XH 200	76040 5B	4WF	3020	75	282,98	280,18	296	160	245	64	51	6,5		
	SENZA FLANGIA WITHOUT FLANGES OHNE FLANSCHEN SANS FLASQUES SIN TAPETAS	48 XH 200	76048 3D	9W	3020	75	339,57	336,78	-	160	300	64	51	6,5	
		60 XH 200	76060 8B	7A	3535	90	424,47	421,67	-	190	385	64	89	12,5	
		72 XH 200	76072 8B	7A	3535	90	509,36	506,56	-	190	470	64	89	12,5	
		84 XH 200	76084 8B	7A	3535	90	594,25	591,46	-	190	555	64	89	12,5	
		96 XH 200	76096 8B	7A	3535	90	679,15	676,35	-	190	640	64	89	12,5	
		120 XH 200	76120 8B	7A	3535	90	848,93	846,14	-	190	810	64	89	12,5	

XH 300 - 7/8" (22,225 mm)

CARATTERISTICHE FEATURES MERKMALE CARACTERISTIQUES CARACTERÍSTICAS		CODICE CODE SYMBOL FABRIK- NUMMER CODE SYMBOL NUMERO DE FABRICA	CODICE SATI SATI CODE SATI FABRIK- NUMMER CODE SATI NUMERO DE SATI	TIPO TYPE TYP TYPE TIPO	BUSSOLA BUSH BUCHSE MOYEU CASQUILLO	FORO MAX. MAX. BORE MAX. BOHRUNG ALESAGE MAX. AGUJERO MAX.	Dp	De	Df	Dm	Di	F	S	R	PESO WEIGHT GEWICHT POIDS PESO Kg.
GHISA CAST IRON GRAUGUSS FONTE HIERRO FUNDIDO	CON FLANGIA WITH FLANGES MIT FLANSCHEN AVEC FLASQUES CON TAPETAS	18 XH 300	77018 7A	5F	2517	60	127,34	124,55	142	-	95	90	45	45	
		20 XH 300	77020 7A	5F	2517	60	141,49	138,69	158	-	110	90	45	45	
		22 XH 300	77022 7A	5F	2517	60	155,64	152,84	168	-	120	90	45	45	
		24 XH 300	77024 7A	5F	2517	60	169,79	166,99	184	-	135	90	45	45	
		26 XH 300	77026 7A	5F	2517	60	183,94	181,14	200	-	150	90	45	45	
		28 XH 300	77028 7A	5F	3020	75	198,08	195,29	211	-	165	90	51	39	
		30 XH 300	77030 7A	5F	3020	75	212,23	209,44	226	-	180	90	51	39	
		32 XH 300	77032 7A	5F	3020	75	226,38	223,59	240	-	195	90	51	39	
	40 XH 300	77040 5B	4WF	3020	75	282,98	280,18	296	160	245	90	51	19,5		
	SENZA FLANGIA WITHOUT FLANGES OHNE FLANSCHEN SANS FLASQUES SIN TAPETAS	48 XH 300	77048 3E	9A	3020	75	339,57	336,78	-	160	300	90	51	19,5	
		60 XH 300	77060 3E	9A	3535	90	424,47	421,67	-	190	385	90	89	0,5	
		72 XH 300	77072 3E	9A	3535	90	509,36	506,56	-	190	470	90	89	0,5	
		84 XH 300	77084 8B	7A	4040	100	594,25	591,46	-	230	555	90	102	6	
		96 XH 300	77096 8B	7A	4040	100	679,15	676,35	-	230	640	90	102	6	
		120 XH 300	77120 8B	7A	4040	100	848,93	846,14	-	230	810	90	102	6	